

# RA-P10Rxx-C00

## 10Gb/s SFP+ Active Optical Cable

### Product Features

- Low power consumption <0.35W per end
- Electrical interface compliant to SFF-8431
- Up to 300m on OM3 MMF
- 850nm VCSEL transmitter, PIN photo-detector receiver
- Operating case temperature 0 ° C to +70° C
- 3.3V power supply voltage
- RoHS 6 compliant
- Hot Pluggable SFP+ form factor
- Good EMI performance

### Applications

- 10 Gigabit Ethernet
- 1x InfiniBand QDR. DDR, SDR
- High-performance computing Clusters
- 4G and 8G Fibre Channel Applications
- Servers, switches, storage, host card adapters and data center

The RayOptek’s SFP+ Active Optical Cables are direct-attach fiber assemblies with SFP+ connectors. They have very good power consumption performance. They are suitable for very short distances and offer a cost-effective way to connect within racks and across adjacent racks. The length of RayOptek’s SFP+ Active Optical Cables is up to 300 meters on OM3 MMF.

### Ordering Information

Part Number	Description
RA-P10Rxx-C00	SFP+ 10Gb/s Active Optical Cable

#### Notes:

where "xx" denotes cable length in meters. Examples are as follows:  
 xx = 03 for 3m,    xx = 10 for 10m,    xx = 50 for 50m,    xx = A0 for 100m

#### For More Information:

Wuhan RayOptek Co.,Ltd  
 Address: G3-201,NewEnergy Building,No.999 Gao Xin Road, Wuhan, Hubei, China  
 Phone: 0086-27-87106345    Fax: 0086-27-87106345    Email: sales@rayoptek.com

### Absolute Maximum Ratings

The operation in excess of any absolute maximum ratings might cause permanent damage to this module.

Parameter	Symbol	Min	Max	Unit	Notes
Storage Temperature	TST	-20	85	degC	
Relative Humidity(non-condensing)	RH	0	85	%	
Operating Case Temperature	TOPC	0	70	degC	
Supply Voltage	VCC	-0.3	3.6	V	
Input Voltage	Vin	-0.3	Vcc+0.3	V	

### Recommended Operating Conditions and Power Supply Requirements

Parameter	Symbol	Min	Typical	Max	Unit	Notes
Operating Case Temperature	TOPC	0		70	degC	Operating Case Temperature
Power Supply Voltage	VCC	3.13	3.3	3.47	V	Power Supply Voltage
Power Consumption				0.35	W	Power Consumption
Data Rate	DR		10.3		Gbps	Data Rate
Data Speed Tolerance	$\Delta$ DR	-100		+100	ppm	Data Speed Tolerance



### Electrical Specifications

Parameter	Symbol	Min	Typical	Max	Unit	Notes
Differential input impedance	Zin	90	100	110	ohm	
Differential Output impedance	Zout	90	100	110	ohm	
Differential input voltage amplitude	$\Delta$ Vin	100		1800	mVp-p	
Differential output voltage amplitude	$\Delta$ Vout	400		800	mVp-p	
Bit Error Rate	BR				E-12	
Input Logic Level High	VIH	2.0		VCC	V	
Input Logic Level Low	VIL	0		0.8	V	


### Optical Characteristics

Parameter	Symbol	Min	Typical	Max	Unit	Notes
<b>Transmitter</b>						
Center Wavelength	$\lambda$ C	840	850	860	nm	
Average optical Power	PAVG	-6			dBm	
Rise/Fall Time	Tr/Tf			50	Ps	
Extinction Ratio	ER	3.5			dB	
Relative Intensity Noise	Rin			-128	dB/Hz	
Optical Return Loss Tolerance	TOL			12	dB	
Transmitter Reflectance	RT			-12	dB	
<b>Receiver</b>						
Center Wavelength	$\lambda$ C	840	850	860	nm	
Overload, each lane	OVL	-			dBm	
Receiver Sensitivity in OMA, each Lane	SEN			-11	dBm	

Mechanical Dimensions

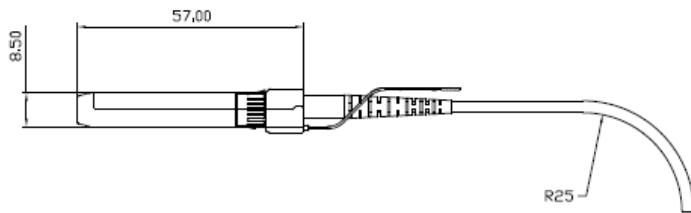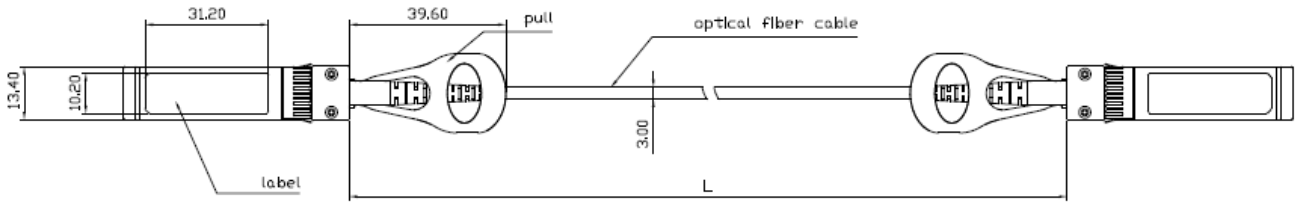

Electrical Pad Layout

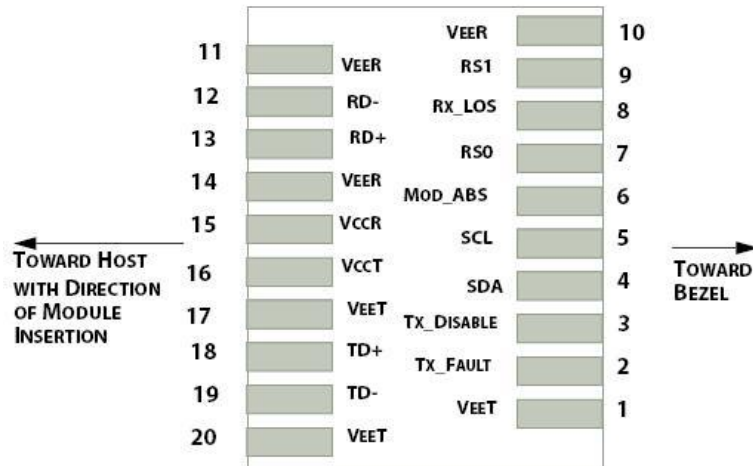

Pin Assignment

PIN#	Symbol	Description	Remark
1	VEET	Transmitter ground (common with receiver ground)	
2	TFAULT	Transmitter Fault.	
3	TDIS	Transmitter Disable. Laser output disable on high or open	
4	SDA	Data line for serial ID	
5	SCL	Clock line for serial ID	
6	MOD_ABS	Module Absent. Grounded within the module	
7	RS0	No connection required	
8	LOS	Loss of Signal indication. Logic 0 indicates normal operation	
9	RS1	No connection required	
10	VEER	Receiver ground (common with transmitter ground)	
11	VEER	Receiver ground (common with transmitter ground)	

---

12	RD-	Receiver Inverted DATA out. AC coupled
13	RD+	Receiver Non-inverted DATA out. AC coupled
14	VEER	Receiver ground (common with transmitter ground)
15	VCCR	Receiver power supply
16	VCCT	Transmitter power supply
17	VEET	Transmitter ground (common with receiver ground)
18	TD+	Transmitter Non-Inverted DATA in. AC coupled
19	TD-	Transmitter Inverted DATA in. AC coupled
20	VEET	Transmitter ground (common with receiver ground)

---

## Wuhan RayOptek CO.,Ltd

---

### Headquarter

📍 Address:G3-201, New Energy Building, No.999 Gao Xin Road, Wuhan, Hubei, China

☎ Tel:+86-27-87106345

✉ Email:sales@rayoptek.com

---